

CUSTOMIZING BESPOKE CONCRETE





Innovative solutions in concrete for interior design

DEBOSSED



DEBOSSED WITH METAL BRASS, STAINLESS STEEL & COPPER INLAY






DEBOSSED WITH METAL BRASS, STAINLESS STEEL & COPPER INLAY





DEBOSSED AND PAINTED

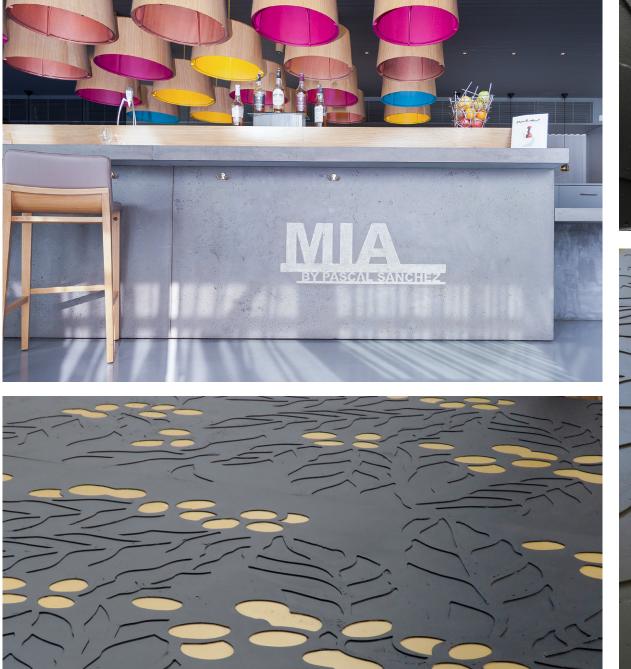





EMBOSSED













STIPPED CONCRETE

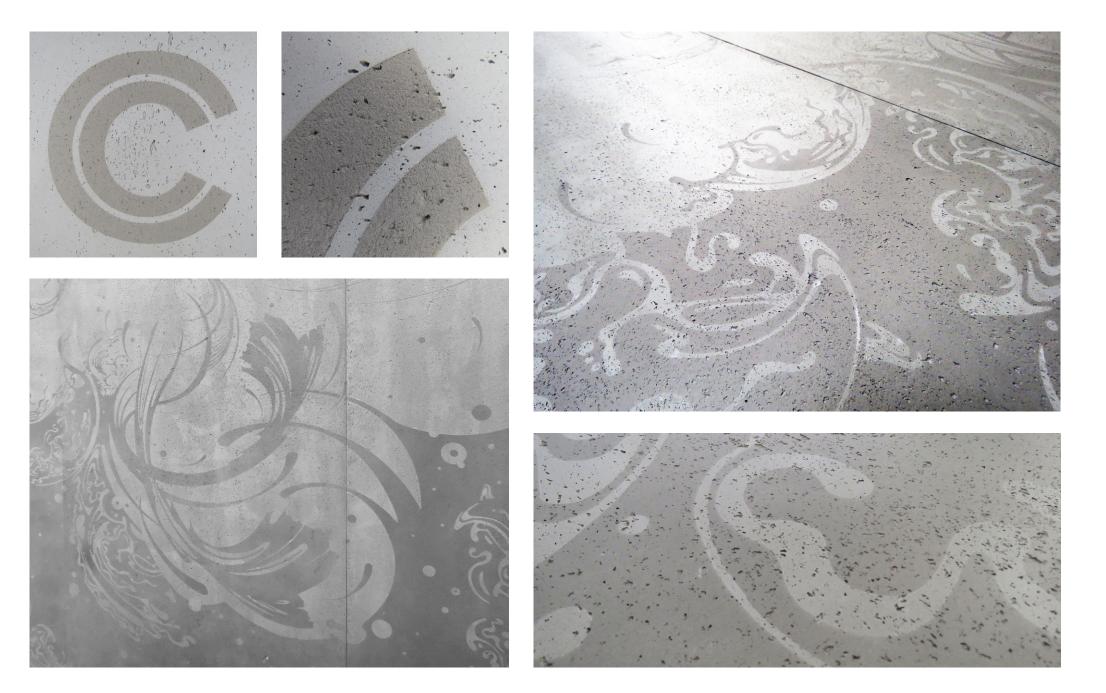

GOLD, SILVER, COPPER FINISHES

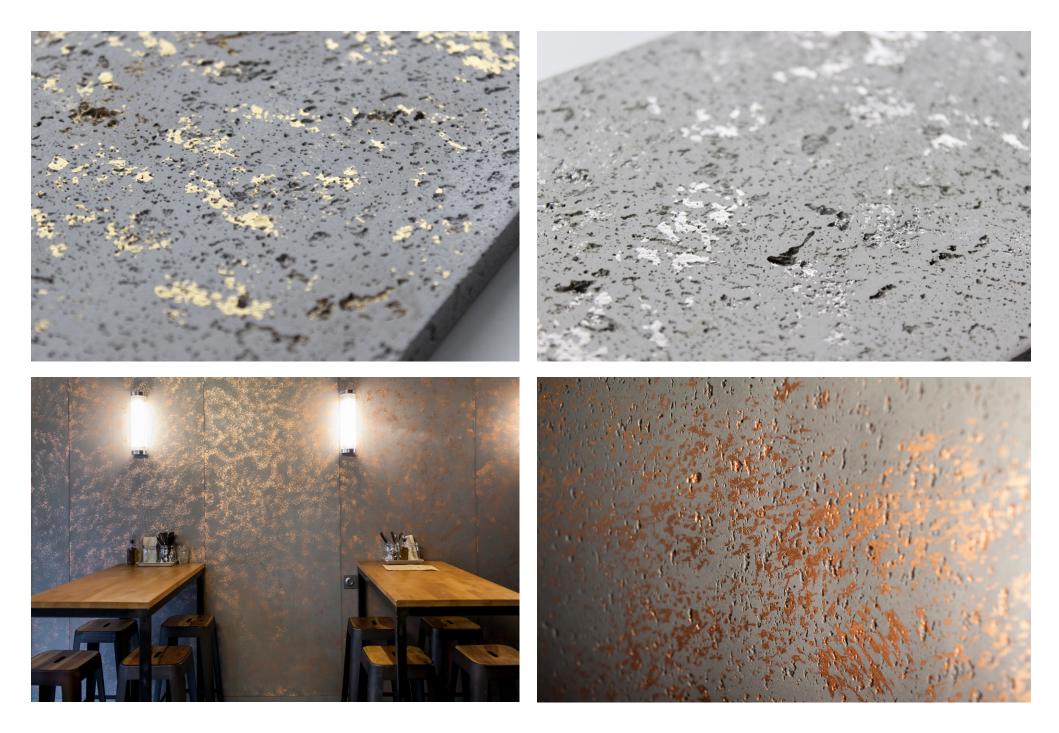

TECHNICAL DATA LOGOS & PATTERNS

PANBETON® & SLIMBETON®: 2 mm deep (1 mm depth possible)

DEBOSS DEPTH

BETON LEGE®: 1 to 10 mm deep

WIDTH OF THE PATTERN Minimum line thickness of your logos and patterns: 4 to 5 mm & NUMBERS



FILES TO SEND US

Vectorized files: .in, .ai, .dwg, .dxf format

